


# A2

Socket button head screws  
stainless steel

ISO 7380

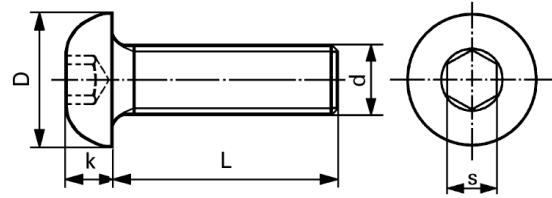


d	M3		M4		M5		M6	
D	5,7		7,6		9,5		10,5	
s	2		2,5		3		4	
k	1,65		2,2		2,75		3,3	
L quantity	100	1000	100	1000	100	1000	100	1000
6	22.50	18.10	22.50	18.10				
8	22.50	18.10	22.50	18.10	22.50	18.10	34.50	28.60
10	24.-	19.20	22.50	18.10	24.-	20.-	35.25	29.50
12	24.25	19.40	24.-	19.20	25.75	21.50	35.75	29.75
(14)			26.50	22.-			36.50	30.80
16	26.25	21.75	26.50	22.-	28.25	23.50	40.-	33.50
20			27.50	23.30	28.50	23.75	43.50	36.50
25			28.65	24.90	34.-	28.25	49.50	41.50
30					37.25	30.75	55.-	46.-
40					61.-	52.10	62.-	53.-
50					77.50	65.-	70.-	59.55
Reduced tightening and loads: refer to page T 25								

# A2

Socket button head screws  
stainless steel

ISO 7380

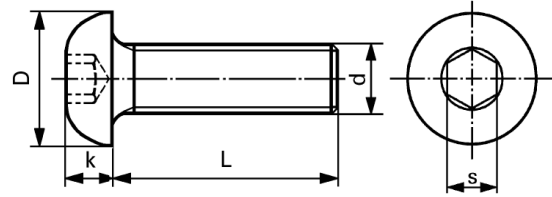


d	M8		M 10		M12		
D	14		17,5		21		
s	5		6		8		
k	4,4		5,5		6,6		
L	quantity	100	1000	100	1000	100	1000
10		90.50	74.-				
12		94.50	75.50	175.-	146.-		
16		106.-	87.50	177.-	148.-	205.-	160.-
20		116.-	101.-	198.-	157.-	208.-	163.-
25		127.-	106.-	221.-	177.-	230.-	187.-
30		143.-	122.-	237.-	200.-	245.-	210.-
35				245.-	208.-		
40		148.-	127.-			266.-	221.-
50		161.-	140.-	280.-	245.-	305.-	266.-
60		212.-	190.-				
80		254.-	230.-				
Reduced tightening and loads: refer to page T							

# A2


Tamper proof socket  
button head screws, stainless steel

~ ISO 7380 - S

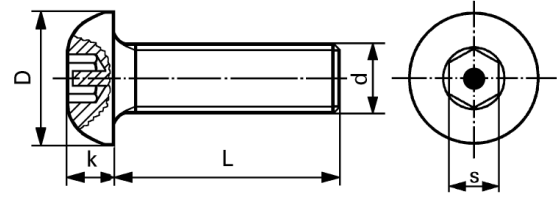

d	M4		M5		M6		M8	
D	7,6		9,5		10,5		14	
s	2,5		3		4		5	
k	2,2		2,75		3,3		4,4	
L quantity	100	1000	100	1000	100	1000	100	1000
8	53.-	34.-						
10	53.-	34.-	60.50	39.-	74.50	49.50		
12	54.-	34.75	62.-	39.50	75.50	50.50	138.-	92.-
16	54.-	34.75	62.-	39.50	76.50	51.-	144.-	96.-
20	57.50	36.75	64.50	43.50	83.-	55.-	151.-	101.-
25			75.50	50.50	94.-	63.-	156.-	108.-
30			85.-	62.-	105.-	70.-	179.-	124.-
35					110.-	75.-		

Reduced tightening and loads: refer to page T 25



See page C 77