

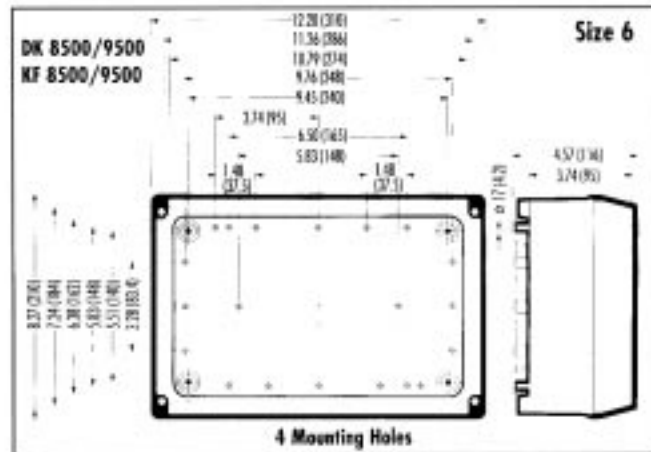
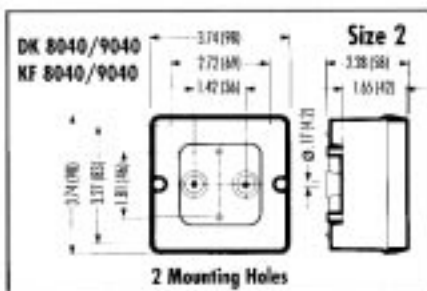
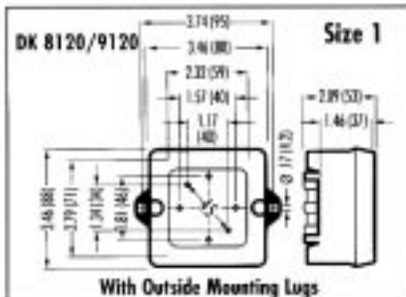
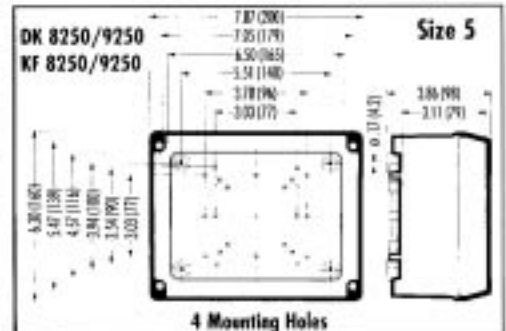


Meets all European and US standards. Plug or screw terminal blocks into holes inside enclosure. Provides clean power distribution. Maximum Voltage = 600V.


BOX SIZE	PART NUMBER	NO. OF POLES	NUMBER AND SIZE WIRE PER POLE (mm ²)	MAX. POWER (Amp.)
1 & 2	DKL 04	5	3 x 4.0, 4 x 2.5, 6 x 1.5	35
3	KKL 06	5	3 x 6.0, 4 x 4.0, 4 x 2.5	40
4	KLS 10	5	4 x 10.0, 4 x 6.0, 4 x 4.0	63
5 & 6	KLS 25	5	4 x 25.0, 4 x 16.0, 4 x 10.0	102
6	KLS 54	4	4 x 70.0, 4 x 50.0, 4 x 35.0, 4 x 25.0, 4 x 16.0	216
6	KLS 55	5	4 x 50.0, 4 x 35.0, 4 x 25.0, 4 x 16.0	170

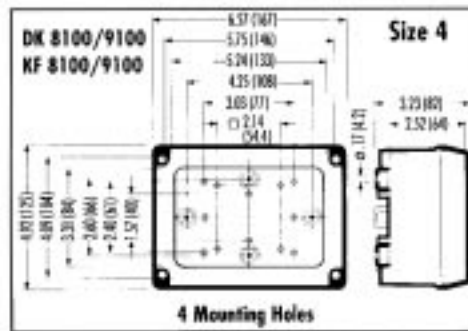

Dimensions Inches (mm)

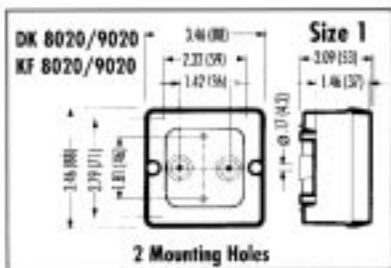

Dimensions and specifications may be changed without prior notice

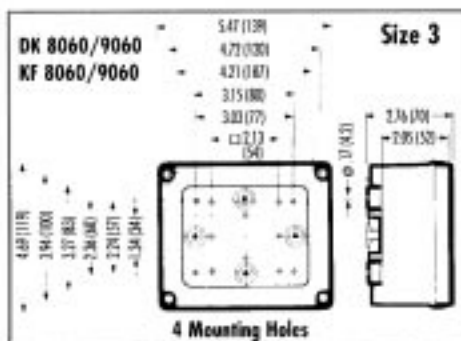

Notes:

1. Pg knock-outs are liquid tight until punched out with screwdriver.
2. Hinges and latches are mounted on narrow side.
3. Smooth sides can be drilled or punched for connectors or hubs as required.
4. Yellow shaded area is useable space in enclosure.
5. Mounting screws are #8 UNC (.16" ø). Punch or drill holes and cap recess with rubber plugs located inside the cover.

Equivalent AWG sizes:

1.5mm ² = 16 AWG	6.0mm ² = 10 AWG	25.0mm ² = 4 AWG
2.5mm ² = 14 AWG	10.0mm ² = 8 AWG	35.0mm ² = 2 AWG
4.0mm ² = 12 AWG	16.0mm ² = 6 AWG	50.0mm ² = 1 AWG
		70.0mm ² = 2/0 AWG