


HTD5 Timing Belts



Pitch 5 mm (.197")

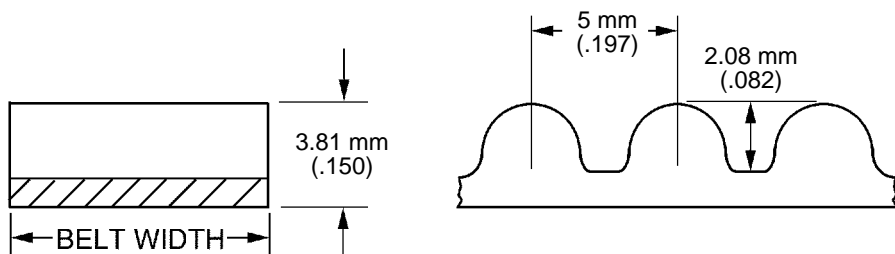

MATERIAL:

Nylon Covered, Fiberglass Reinforced, Neoprene

LOADING CAPACITY:

130 N/mm (742 lbf/in.) Belt Width

BREAKING STRENGTH:

≥160 N/mm (914 lbf/in.) Belt Width

TEMPERATURE RANGE:

-40°C to 120°C (-40°F to 248°F)

QB-HTD5 – –

PITCH LENGTH CODE

WIDTH CODE	Belt* Width
09	9 mm (.354)
15	15 mm (.591)
25	25 mm (.984)

PITCH LENGTH CODE	Pitch Length		No. of Teeth
	mm	Inch	
0200	200	7.874	40
0210	210	8.268	42
0225	225	8.858	45
0235	235	9.252	47
0250	250	9.843	50
0255	255	10.039	51
0285	285	11.220	57
0295	295	11.614	59
0300	300	11.811	60
0305	305	12.008	61
0310	310	12.205	62
0320	320	12.598	64
0325	325	12.795	65
0330	330	12.992	66
0340	340	13.386	68
0350	350	13.780	70
0365	365	14.370	73
0375	375	14.764	75
0400	400	15.748	80
0420	420	16.535	84

PITCH LENGTH CODE	Pitch Length		No. of Teeth
	mm	Inch	
0425	425	16.732	85
0450	450	17.717	90
0460	460	18.110	92
0475	475	18.701	95
0480	480	18.898	96
0500	500	19.685	100
0520	520	20.472	104
0525	525	20.669	105
0535	535	21.063	107
0540	540	21.260	108
0550	550	21.654	110
0560	560	22.047	112
0565	565	22.244	113
0575	575	22.638	115
0600	600	23.622	120
0610	610	24.016	122
0615	615	24.213	123
0625	625	24.606	125
0630	630	24.803	126
0635	635	25.000	127

PITCH LENGTH CODE	Pitch Length		No. of Teeth
	mm	Inch	
0645	645	25.394	129
0655	655	25.787	131
0670	670	26.378	134
0690	690	27.165	138
0695	695	27.362	139
0700	700	27.559	140
0710	710	27.953	142
0740	740	29.134	148
0745	745	29.331	149
0750	750	29.528	150
0755	755	29.724	151
0770	770	30.315	154
0775	775	30.512	155
0790	790	31.102	158
0800	800	31.496	160
0810	810	31.890	162
0825	825	32.480	165
0830	830	32.677	166
0835	835	32.874	167
0850	850	33.465	170

*Special Widths - cut to size from sleeves available from stock.

Continued on the next page


QTC, Econobelt & Zetasassi products are available from: MARYLAND METRICS
P.O.Box 261 Owings Mills, MD 21117 USA E-mail: sales@mdmetric.com
phones: (410)358-3130 (800)638-1830 faxes: (410)358-3142 (800)872-9329 url: http://mdmetric.com

copyright 2003 maryland metrics/qtc/econobelt/zetasassi

HTD5 Timing Belts



Pitch 5 mm (.197")

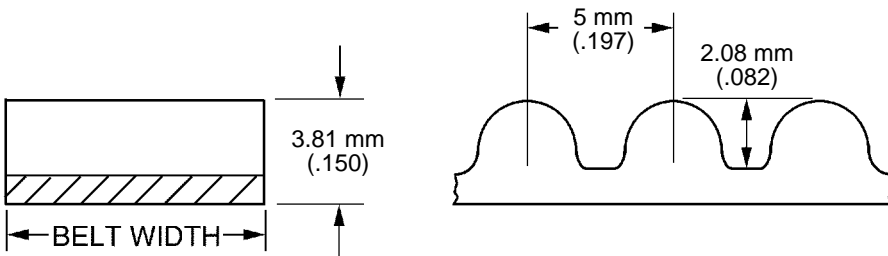

MATERIAL:
Nylon Covered, Fiberglass Reinforced, Neoprene

LOADING CAPACITY:
130 N/mm (742 lbf/in.) Belt Width

BREAKING STRENGTH:
≥160 N/mm (914 lbf/in.) Belt Width

TEMPERATURE RANGE:
-40°C to 120°C (-40°F to 248°F)

QB-HTD5 — —

PITCH LENGTH CODE

WIDTH CODE	Belt* Width
09	9 mm (.354)
15	15 mm (.591)
25	25 mm (.984)

PITCH LENGTH CODE	Pitch Length		No. of Teeth
	mm	Inch	
0860	860	33.858	172
0890	890	35.039	178
0900	900	35.433	180
0920	920	36.220	184
0950	950	37.402	190
0960	960	37.795	192
0975	975	38.386	195
1000	1000	39.370	200
1025	1025	40.354	205
1050	1050	41.339	210
1100	1100	43.307	220
1125	1125	44.291	225

PITCH LENGTH CODE	Pitch Length		No. of Teeth
	mm	Inch	
1180	1180	46.457	236
1225	1225	48.228	245
1270	1270	50.000	254
1290	1290	50.787	258
1350	1350	53.150	270
1400	1400	55.118	280
1420	1420	55.906	284
1455	1455	57.283	291
1500	1500	59.055	300
1595	1595	62.795	319
1700	1700	66.929	340
1800	1800	70.866	360

PITCH LENGTH CODE	Pitch Length		No. of Teeth
	mm	Inch	
1870	1870	73.622	374
2000	2000	78.740	400
2050	2050	80.709	410
2100	2100	82.677	420
2350	2350	92.520	470
3255	3255	128.150	651
3750	3750	147.638	750
3770	3770	148.425	754
5300	5300	208.661	1060
7000	7000	275.591	1400

*Special Widths - cut to size from sleeves available from stock.

QTC, Econobelt & Zetasassi products are available from: MARYLAND METRICS
P.O.Box 261 Owings Mills, MD 21117 USA E-mail: sales@mdmetric.com
phones: (410)358-3130 (800)638-1830 faxes: (410)358-3142 (800)872-9329 url: http://mdmetric.com

copyright 2003 maryland metrics/qtc/econobelt/zetasassi