


T10 Timing Belts



Pitch 10 mm (.394")

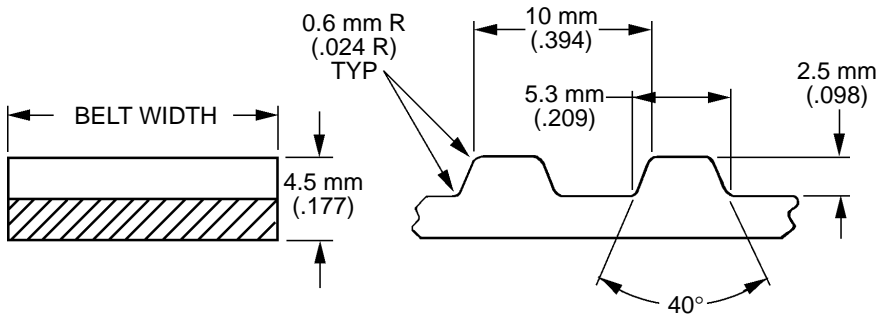


MATERIAL:
Nylon Covered, Fiberglass Reinforced, Neoprene

LOADING CAPACITY:
220 N/mm (1256 lbf/in.) Belt Width

BREAKING STRENGTH:
≥270 N/mm (1542 lbf/in.) Belt Width

TEMPERATURE RANGE:
-40°C to 120°C (-40°F to 248°F)

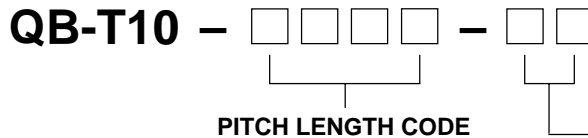

WIDTH CODE	Belt* Width
16	16 mm (.630)
25	25 mm (.984)
32	32 mm (1.260)

PITCH LENGTH CODE	Pitch Length		No. of Teeth
	mm	Inch	
0260	260	10.236	26
0320	320	12.598	32
0340	340	13.386	34
0370	370	14.567	37
0400	400	15.748	40
0410	410	16.142	41
0440	440	17.323	44
0450	450	17.717	45
0460	460	18.110	46
0480	480	18.898	48
0500	500	19.685	50
0530	530	20.866	53
0540	540	21.260	54
0550	550	21.654	55
0560	560	22.047	56
0580	580	22.835	58
0600	600	23.622	60
0610	610	24.016	61
0630	630	24.803	63
0660	660	25.984	66

PITCH LENGTH CODE	Pitch Length		No. of Teeth
	mm	Inch	
0700	700	27.559	70
0720	720	28.346	72
0730	730	28.740	73
0750	750	29.528	75
0770	770	30.315	77
0780	780	30.709	78
0800	800	31.496	80
0810	810	31.890	81
0840	840	33.071	84
0850	850	33.465	85
0880	880	34.646	88
0890	890	35.039	89
0900	900	35.433	90
0910	910	35.827	91
0920	920	36.220	92
0950	950	37.402	95
0960	960	37.795	96
0970	970	38.189	97
0980	980	38.583	98
1000	1000	39.370	100

PITCH LENGTH CODE	Pitch Length		No. of Teeth
	mm	Inch	
1010	1010	39.764	101
1050	1050	41.339	105
1080	1080	42.520	108
1100	1100	43.307	110
1110	1110	43.701	111
1140	1140	44.882	114
1150	1150	45.276	115
1200	1200	47.244	120
1210	1210	47.638	121
1240	1240	48.819	124
1250	1250	49.213	125
1260	1260	49.606	126
1280	1280	50.394	128
1300	1300	51.181	130
1320	1320	51.969	132
1350	1350	53.150	135
1390	1390	54.724	139
1400	1400	55.118	140
1420	1420	55.906	142
1450	1450	57.087	145

*Special Widths - cut to size from sleeves available from stock.

Continued on the next page


QTC, Econobelt & Zetasassi products are available from: MARYLAND METRICS
P.O.Box 261 Owings Mills, MD 21117 USA E-mail: sales@mdmetric.com
phones: (410)358-3130 (800)638-1830 faxes: (410)358-3142 (800)872-9329 url: http://mdmetric.com

copyright 2003 maryland metrics/qtc/econobelt/zetasassi

T10 Timing Belts



Pitch 10 mm (.394")

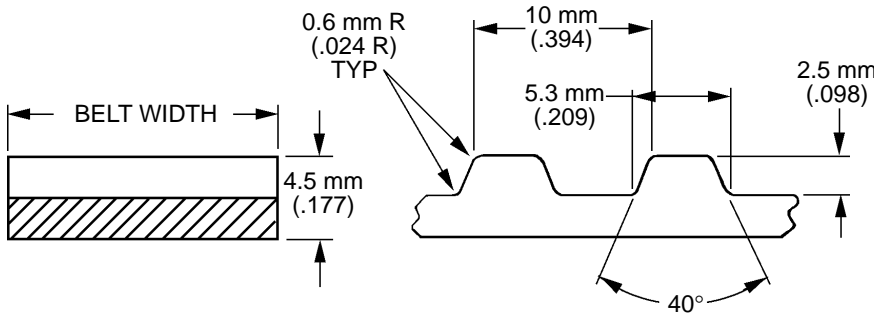

MATERIAL:

Nylon Covered, Fiberglass Reinforced, Neoprene

LOADING CAPACITY:

220 N/mm (1256 lbf/in.) Belt Width

BREAKING STRENGTH:

≥270 N/mm (1542 lbf/in.) Belt Width

TEMPERATURE RANGE:

-40°C to 120°C (-40°F to 248°F)

QB-T10 - [] [] [] [] - [] []

PITCH LENGTH CODE

WIDTH CODE	Belt* Width
16	16 mm (.630)
25	25 mm (.984)
32	32 mm (1.260)

PITCH LENGTH CODE	Pitch Length		No. of Teeth
	mm	Inch	
1460	1460	57.480	146
1480	1480	58.268	148
1520	1520	59.843	152
1560	1560	61.417	156
1600	1600	62.992	160
1610	1610	63.386	161
1640	1640	64.567	164
1690	1690	66.535	169
1700	1700	66.929	170
1750	1750	68.898	175
1780	1780	70.079	178
1800	1800	70.866	180
1860	1860	73.228	186
1880	1880	74.016	188
1960	1960	77.165	196

PITCH LENGTH CODE	Pitch Length		No. of Teeth
	mm	Inch	
1980	1980	77.953	198
2020	2020	79.528	202
2080	2080	81.890	208
2090	2090	82.283	209
2100	2100	82.677	210
2200	2200	86.614	220
2250	2250	88.583	225
2270	2270	89.370	227
2300	2300	90.551	230
2360	2360	92.913	236
2380	2380	93.701	238
2500	2500	98.425	250
2590	2590	101.969	259
2610	2610	102.756	261
2650	2650	104.331	265

PITCH LENGTH CODE	Pitch Length		No. of Teeth
	mm	Inch	
2880	2880	113.386	288
3000	3000	118.110	300
3300	3300	129.921	330
3500	3500	137.795	350
3600	3600	141.732	360
3680	3680	144.882	368
3870	3870	152.362	387
4040	4040	159.055	404
4680	4680	184.252	468
5060	5060	199.213	506
5360	5360	211.024	536
5670	5670	223.228	567
6290	6290	247.638	629
7000	7000	275.591	700
7050	7050	277.559	705

*Special Widths - cut to size from sleeves available from stock.

QTC, Econobelt & Zetasassi products are available from: MARYLAND METRICS
P.O.Box 261 Owings Mills, MD 21117 USA E-mail: sales@mdmetric.com
phones: (410)358-3130 (800)638-1830 faxes: (410)358-3142 (800)872-9329 url: http://mdmetric.com

copyright 2003 maryland metrics/qtc/econobelt/zetasassi